



Cable ID: 024



Date / Time: 05/29/2017 01:29:28 PM
Headroom 5.6 dB (NEXT 36-45)
Test Limit: TIA Cat 5e Channel (+All)
 Cable Type: Cat 5e U/UTP
 NVP: 69.0%

Operator: GERALDO
 Software Version: V3.0 Build 6
 Limits Version: V3.0
 Calibration Date:
 Main (Module): 06/06/2013
 Remote (Module): 06/04/2013

Test Summary: FAIL

Model: DSX-5000
 Main S/N: 2420012
 Remote S/N: 2420016
 Main Adapter: DSX-PLA004
 Remote Adapter: DSX-PLA004

Length (ft), Limit 328	[Pair 36]	32
Prop. Delay (ns), Limit 555	[Pair 12]	49
Delay Skew (ns), Limit 50	[Pair 12]	2
Resistance (ohms)	[Pair 45]	Open
Resist. Unbal. (ohms), Limit 0.20	[Pair 45]	... F
Insertion Loss Margin (dB)	[Pair 45]	-8.6 F
Frequency (MHz)	[Pair 45]	1.9
Limit (dB)	[Pair 45]	3.0

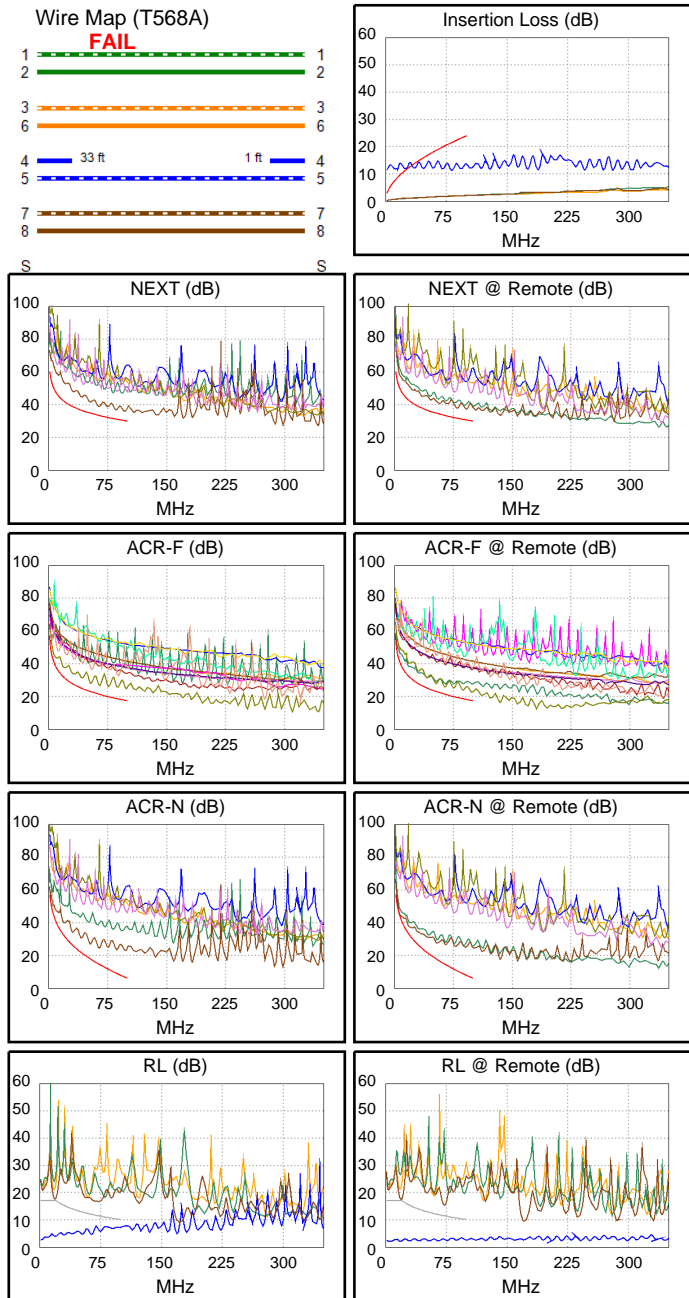

Worst Case Margin Worst Case Value

PASS	MAIN	SR	MAIN	SR
Worst Pair	36-45	36-45	36-45	36-45
NEXT (dB)	5.6	6.0	5.7	6.6
Freq. (MHz)	85.5	79.8	97.3	92.3
Limit (dB)	31.3	31.8	30.3	30.7
Worst Pair	45	45	45	45
PS NEXT (dB)	8.2	7.3	8.3	8.2
Freq. (MHz)	85.5	78.8	97.3	100.0
Limit (dB)	28.3	28.9	27.3	27.1

PASS	MAIN	SR	MAIN	SR
Worst Pair	36-45	12-45	36-45	36-45
ACR-F (dB)	4.4	3.4	7.1	5.0
Freq. (MHz)	6.6	2.8	98.8	99.3
Limit (dB)	41.0	48.6	17.5	17.5
Worst Pair	45	45	45	45
PS ACR-F (dB)	3.6	3.0	10.0	6.7
Freq. (MHz)	1.0	1.0	99.0	99.3
Limit (dB)	54.4	54.4	14.5	14.5

N/A	MAIN	SR	MAIN	SR
Worst Pair	36-45	36-45	36-45	36-45
ACR-N (dB)	2.9	-0.1	16.5	18.6
Freq. (MHz)	1.9	5.6	98.3	100.0
Limit (dB)	55.8	45.8	6.4	6.1
Worst Pair	45	45	45	45
PS ACR-N (dB)	5.2	1.0	19.0	18.7
Freq. (MHz)	1.9	5.6	97.8	100.0
Limit (dB)	52.8	42.8	3.5	3.1

FAIL	MAIN	SR	MAIN	SR
Worst Pair	45	45	45	45
RL (dB)	-14.5 F	-15.0 F	-14.5	-15.0
Freq. (MHz)	1.8	18.4	1.8	18.4
Limit (dB)	17.0	17.0	17.0	17.0



Cable ID: 024

Date / Time: 05/29/2017 01:29:28 PM
Headroom 5.6 dB (NEXT 36-45)
Test Limit: TIA Cat 5e Channel (+All)
 Cable Type: Cat 5e U/UTP
 NVP: 69.0%

Operator: GERALDO
 Software Version: V3.0 Build 6
 Limits Version: V3.0
 Calibration Date:
 Main (Module): 06/06/2013
 Remote (Module): 06/04/2013

Test Summary: FAIL

Model: DSX-5000
 Main S/N: 2420012
 Remote S/N: 2420016
 Main Adapter: DSX-PLA004
 Remote Adapter: DSX-PLA004

Worst Case Margin		Worst Case Value		
N/A	MAIN	SR	MAIN	SR
Worst Pair			45	45
TCL (dB)			8.1	8.2
Freq. (MHz)			1.9	14.5
Limit (dB)				
N/A	MAIN	SR	MAIN	SR
Worst Pair			12-45	12-45
CDNEXT (dB)			15.2	15.5
Freq. (MHz)			319.0	235.5
Limit (dB)				
N/A	MAIN	SR	MAIN	SR
Worst Pair			36	45
CMRL (dB)			3.9	4.5
Freq. (MHz)			337.0	17.3
Limit (dB)				
N/A	MAIN	SR	MAIN	SR
Worst Pair			45	45
ELTCTL (dB)			-3.2	-7.3
Freq. (MHz)			27.0	158.0
Limit (dB)				

