
Cable ID	Summary	Test Limit	Length	Headroom	Date / Time
151	N/A	Document only	192 ft	N/A	01/01/1970 12:43 AM

Total Length:	192 ft
Number of Reports:	1
Number of Passing Reports:	0
Number of Failing Reports:	0
Number of Warning Reports:	0
Documentation Only:	1

Cable ID: 151


Date / Time: 01/01/1970 12:43:18 AM n = 1.4820 (850 nm)
 Cable Type: OM4 Multimode 50 n = 1.4790 (1300 nm)
 Backscatter Coefficient: -68.0dB (850 nm) Backscatter Coefficient: -75.8dB (1300 nm)

Test Summary: N/A

Modal Bandwidth: 4700MHz-km (850 nm)
 Modal Bandwidth: 500MHz-km (1300 nm)

OTDR End1 EventMap

Fiber Length: 191.9 ft
 Overall Loss: ---

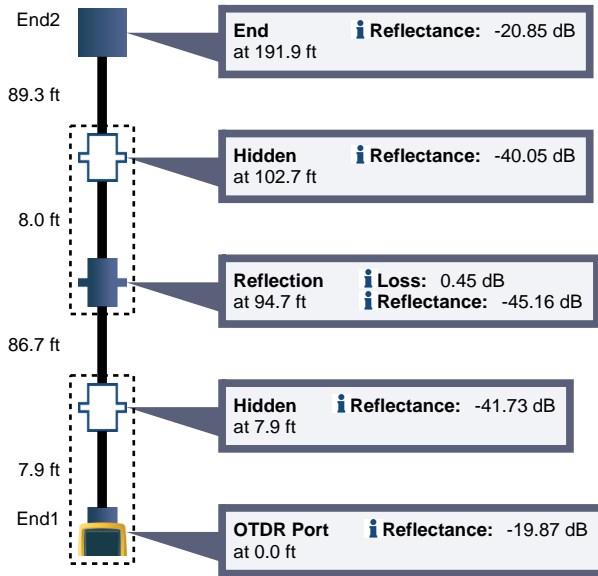

Cable ID: 151


Date / Time: 01/01/1970 12:43:18 AM n = 1.4820 (850 nm)
 Cable Type: OM4 Multimode 50 n = 1.4790 (1300 nm)
 Backscatter Coefficient: -68.0dB (850 nm) Backscatter Coefficient: -75.8dB (1300 nm)

Test Summary: N/A

Modal Bandwidth: 4700MHz-km (850 nm)
 Modal Bandwidth: 500MHz-km (1300 nm)

OTDR End1

Test Limit: Document only
 Limits Version: 2.3
 Date / Time: 01/01/1970 12:43:18 AM
 Operator: SA0 JOSE
 Tester: OptiFiber Pro (2441794 V2.3 Build 2)
 Module: OFP-QUAD (2632002)
 Calibration Date: 12/19/2013

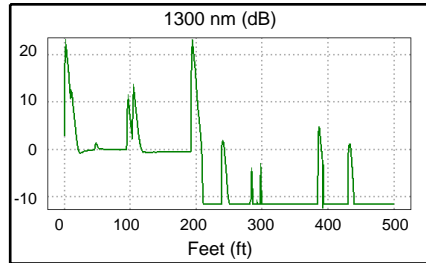

No Launch Compensation

Overall Results	1300 nm	Limit
Overall Length (ft)	191.9	
Overall Loss (dB)	---	
ORL (dB)	20.48	

Settings (Auto OTDR) 1300 nm
 Auto OTDR
 Range (Auto) 501 ft
 Resolution (Auto) 0.1 ft
 Pulse Width (Auto) 3 ns
 Averaging Time (Auto) 2 s
 Loss Threshold (Auto) 0.10 dB
 End Threshold (Auto) 0.00 dB

Events	Loss (dB)		Reflectance (dB)		Attn Coeff (dB/km)	
	1300 nm	Limit	1300 nm	Limit	1300 nm	Limit
191.9 ft End	N/A		-20.85		0.00	
102.7 ft Hidden	N/A		-40.05		N/A	
94.7 ft Reflection	0.45		-45.16		2.68	
7.9 ft Hidden	N/A		-41.73		N/A	
0.0 ft OTDR Port	N/A		-19.87		N/A	

-WARNING: Launch event not found.
 -WARNING: Cannot measure overall loss.
 -WARNING: OTDR Port Connection Quality: Poor